


mob

INSTALLATION INSTRUCTIONS

Wall Concealed Shower System

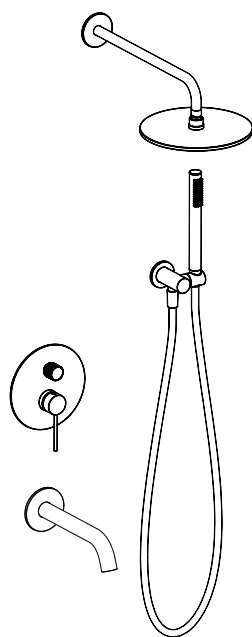

Before Installation

Check whether the product in the package is consistent with the installation instructions

Make sure the product is suitable for the use environment (pressure : 0.03 MPa - 1 MPa, temperature: 5°C - 9 0°C)

Check whether the product and spare parts are damaged





Turn off the waterway switch before installation

Prepare the tools you may need

Recommend Tools



Dimensions

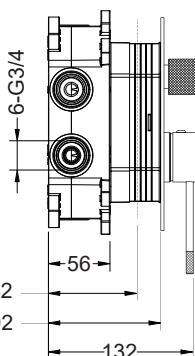



▲ Min= 82
▲ Max= 102

Unit: mm




Ensure that the distance from the bottom of the embedded box to the wall is between this size

Switch regulation




OPEN




CLOSE


Open: when straight line groove is horizontal
Close: when straight line groove is vertical



Solid Wall Cut
Suggested cut dimension:
210*170mm



Hollow Wall and Wall with tiles Cut
Suggested cut dimension: 130*153mm

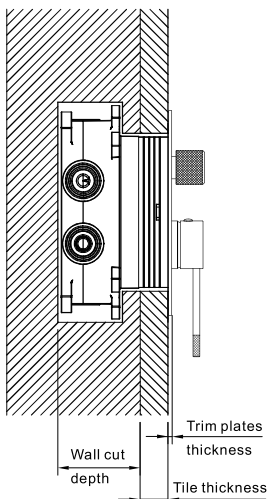

Option 1: If the trim plate is about 13mm thickness, suggested wall cut depth is between 65-85mm

Option 2: If the trim plate is about 3mm thickness, suggested wall cut depth is between 75-95mm


Option 3: If the wall surface is without tile, or not regular tile thickness or use thick marble, the suggested wall cut depth is:

Min: 90mm-(Tile+Trim Plates thickness)


Max: 115mm-(Tile+Trim Plates thickness)

Notice!


1. Notice! If the cut depth is less than the Min cut depth, the trim plate may can't stick to the wall.
2. Notice! If the cut depth is more than the Max cut depth, then handle may can't work properly.
3. Please determine the cut depth before you cut the wall, Please contact with your distributor if products can't work well because of wrong cutted the wall.




1. Connect the pipe with the concealed shower mixer. Left (H) for hot water and right (C) for cold water. Others for mixed water.




2-1. Get the wall cut accordingly to the instruction, check the horizontality and verticality of the embedded box, adjust if necessary. Then fix the concealed box onto the wall.




2-2. Plug the water outlet with plug, apply a 30 min water leakage test under water pressure 1-1.2Mpa. Make sure there is no leakage.



2-3. Use cement or other materials to cover the wall and embedded box.








2-4. Get the hollow wall cut, and install the concealed box from the back of hollow wall, then fix the screws.



3. Put on the tiles or other materials, Make sure surface are even and flat.

Installation

		
4. Cut the plaster shield and make sure the embedded box is at the same lever of the finished wall.	5. Install the fixing plate. (For the valve with 3mm trim plates no need to install this)	6. Open the ball valve and flush the pipe.

			
7. Close the built-in service stop, Take off the antidust cover and sealing block.	8. Fix the mixer body to the corresponding connector, make sure the 4 sealing washers at the back of the mixer body are complete and not loosen.	9. Install the trim plates, valve handles and diverter handles accordingly	10. Install the shower arm and shower bracked to the corresponding pipe interface, connect the head-shower, hand-shower and shower hose

Before Use

In order to ensure the shower functional stability and long-lasting appearance, please follow the following precautions:

The main body of the shower is made of high-quality brass. Brass is soft, so do not hit it with hard objects;

Each component of this product has been professionally assembled and tested before leaving the factory. Non-professionals should not disassemble it to avoid affecting the product warranty;

Do not use this product at overpressure or temperature to avoid excessive harm to your body and irreversible damage to the product;

In order to maintain a better appearance, rinse the surface stains with clean water after each use;

Do not use metal or other hard cleaning tools to clean the product surface to avoid scratching the product;

Do not use acidic or other highly corrosive cleaners to clean the product surface to avoid damaging the product surface coating;

When a product malfunctions, contact the dealer promptly to send a professional to perform maintenance.